


BIG LINE S Monochromatic

DATA-SHEET

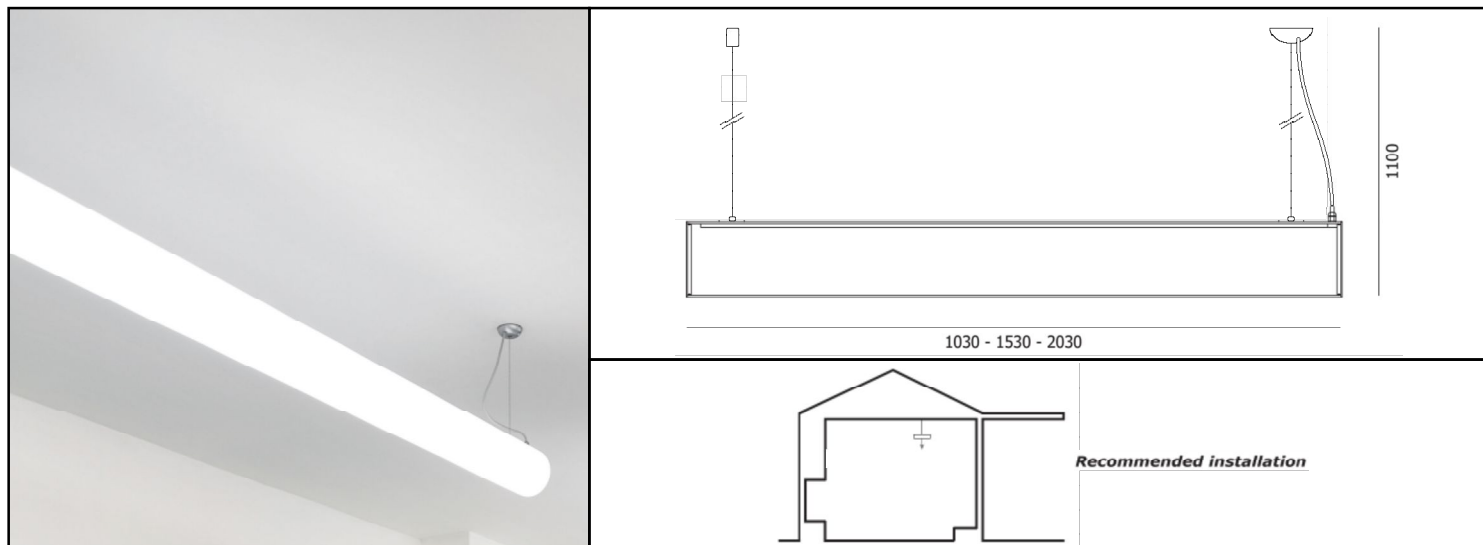

PRODUCT DESCRIPTION:

Light tube emitting a diffused and uniform light for indoor applications.
Body cylinder in PMMA, satin opal polycarbonate, stainless steel.
UV resistance of all materials.

TECHNICALS FEATURES:

Body	Cylinder in PMMA diameter 120mm
Finishes	Opal satin
Screws	Stainless steel inox AISI 316L
Power Supply	24 Vdc constant voltage
Power	70 W/m pitch 4,9mm
Light Source	Mid Power LED
Color Temperature	4000K ; 5500K
Ra	> 80
Chromatic Selection	Mac-Adam 3-step
Lifetime	> 50000 h (TM21)
Optics	Opal screen
Tc metal body	< 90 °C
Ta operating temperature	0 ÷ 40 °C
Functions	On/Off, dimmable
Cable	CAVO FEP+PVC TRASPARENTE 300/500V 2X0,5 mm ² (TRASP-TRASP) Ø 4,2 mm L. 2 m
Weigth	1,8 Kg/m
Installations	Suspended (ceiling)
Norms	EN60598-1 ; EN60598-2 and its parts



NOTE:

Power supplies, control interfaces and dimming to be orderd separately. Aldabra driver consumption is equal to 15% of the fixture nominal power.
Photometric data available at www.aldabra.it

ALDABRA

PROFESSIONAL INTERIOR LIGHTING

BIG LINE S Monochromatic

DATA-SHEET

GENERAL FEATURES:

	power (W)	Length (mm)	pitch (mm)
BLI.01.XXXXX.X	70	1030	4,9
BLI.02.XXXXX.X	105	1530	4,9
BLI.03.XXXXX.X	140	2030	4,9

OPTICAL FEATURES:

BLI.XX.DXXXX.X	Opal screen
-----------------------	-------------

LED FEATURES:


	Mid Power LED	Lm/W	Ra	Chromatic selection
BLI.XX.X40XX.X	4000K warm white	140	>80	MacAdam 3-step
BLI.XX.X55XX.X	5500K neutral white	180	>80	MacAdam 3-step

FINISHES FEATURES:

BLI.XX.XXXP1.X	PMMA
-----------------------	------

BIG LINE W Monochromatic

DATA-SHEET

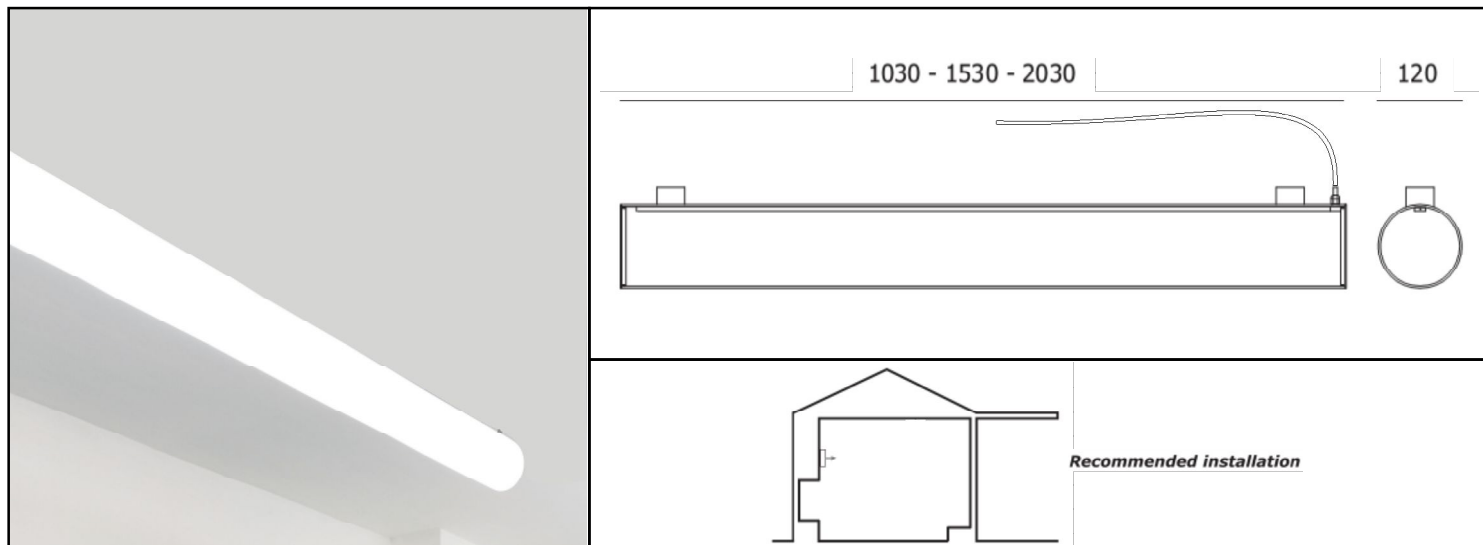

PRODUCT DESCRIPTION:

Light tube emitting a diffused and uniform light for indoor applications.
Body cylinder in PMMA, satin opal polycarbonate, stainless steel.
UV resistance of all materials.

TECHNICALS FEATURES:

Body	Cylinder in PMMA diameter 120mm
Finishes	Opal satin
Screws	Stainless steel inox AISI 316L
Power Supply	24 Vdc constant voltage
Power	70 W/m pitch 4,9mm
Light Source	Mid Power LED
Color Temperature	4000K ; 5500K
Ra	> 80
Chromatic Selection	Mac-Adam 3-step
Lifetime	> 50000 h (TM21)
Optics	Opal screen
Tc metal body	< 90 °C
Ta operating temperature	0 ÷ 40 °C
Functions	On/Off, dimmable
Cable	CAVO FEP+PVC TRASPARENTE 300/500V 2X0,5 mm ² (TRASP-TRASP) Ø 4,2 mm L. 2 m
Weigth	1,8 Kg/m
Installations	Suspended (ceiling)
Norms	EN60598-1 ; EN60598-2 and its parts



NOTE:

Power supplies, control interfaces and dimming to be ordered separately. Aldabra driver consumption is equal to 15% of the fixture nominal power.
Photometric data available at www.aldabra.it

ALDABRA

PROFESSIONAL INTERIOR LIGHTING

BIG LINE W Monochromatic

DATA-SHEET

GENERAL FEATURES:

	power (W)	Length (mm)	pitch (mm)
BLI.04.XXXXX.X	70	1030	4,9
BLI.05.XXXXX.X	105	1530	4,9
BLI.06.XXXXX.X	140	2030	4,9

OPTICAL FEATURES:

BLI.XX. D XXXX.X	Opal screen
-------------------------	-------------

LED FEATURES:


	Mid Power LED	Lm/W	Ra	Chromatic selection
BLI.XX.X 40 XX.X	4000K warm white	140	>80	MacAdam 3-step
BLI.XX.X 55 XX.X	5500K neutral white	180	>80	MacAdam 3-step

FINISHES FEATURES:

BLI.XX.XXX P1 .X	PMMA
-------------------------	------

BIG LINE S DWS

DATA-SHEET

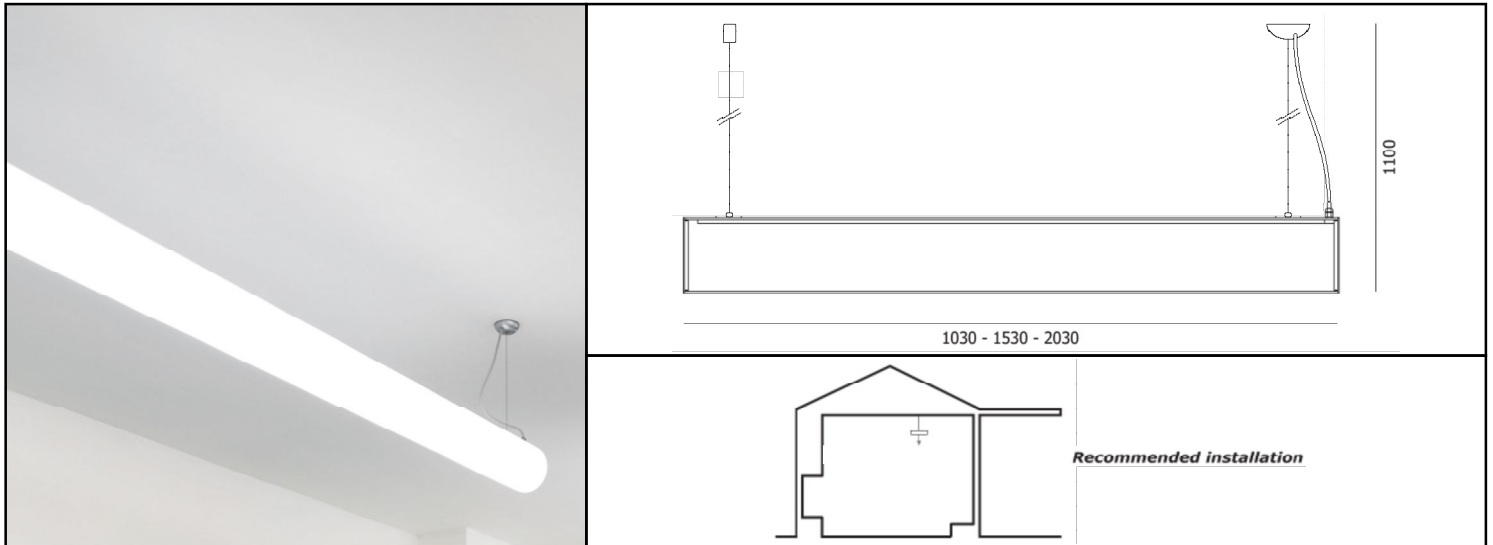

PRODUCT DESCRIPTION:

Light tube emitting a diffused and uniform light for indoor applications.
Body cylinder in PMMA, satin opal polycarbonate, stainless steel.
UV resistance of all materials.

TECHNICALS FEATURES:

Body	Cylinder in PMMA diameter 120mm
Finishes	Opal satin
Screws	Stainless steel inox AISI 316L
Power Supply	24 Vdc constant voltage
Power	42 W/m pitch 25mm
Light Source	Mid Power LED
Color Temperature	2700K ÷ 4000K
Ra	> 80
Chromatic Selection	Mac-Adam 3-step
Lifetime	> 50000 h (TM21)
Optics	Opal screen
Tc metal body	< 90 °C
Ta operating temperature	0 ÷ 40 °C
Functions	On/Off, dimmable
Cable	FROR flameproof 2X0,5 mm ² (white-black)+2X0,25 mm ² (R-G) Ø 6,5 mm L. 1 m
Weigth	1,8 Kg/m
Installations	Suspended (ceiling)
Norms	EN60598-1 ; EN60598-2 and its parts



NOTE:
Power supplies, control interfaces and dimming to be orderd separately. Aldabra driver consumption is equal to 15% of the fixture nominal power.
Photometric data available at www.aldabra.it

ALDABRA

PROFESSIONAL INTERIOR LIGHTING

BIG LINE S DWS

DATA-SHEET

GENERAL FEATURES:

	power (W)	Length (mm)	pitch (mm)
BLI.10.XXXXX.X	42	1030	25
BLI.11.XXXXX.X	63	1530	25
BLI.12.XXXXX.X	84	2030	25

OPTICAL FEATURES:

BLI.XX.DXXXX.X	Opal screen
----------------	-------------


LED FEATURES:

	Mid Power LED	Lm/W	Ra	Chromatic selection
BLI.XX.X98XX.X	2700K ÷ 4000K	140 ÷ 180	>80	MacAdam 3-step

FINISHES FEATURES:

BLI.XX.XXXP1.X	PMMA
----------------	------

BIG LINE S RGB DATA-SHEET

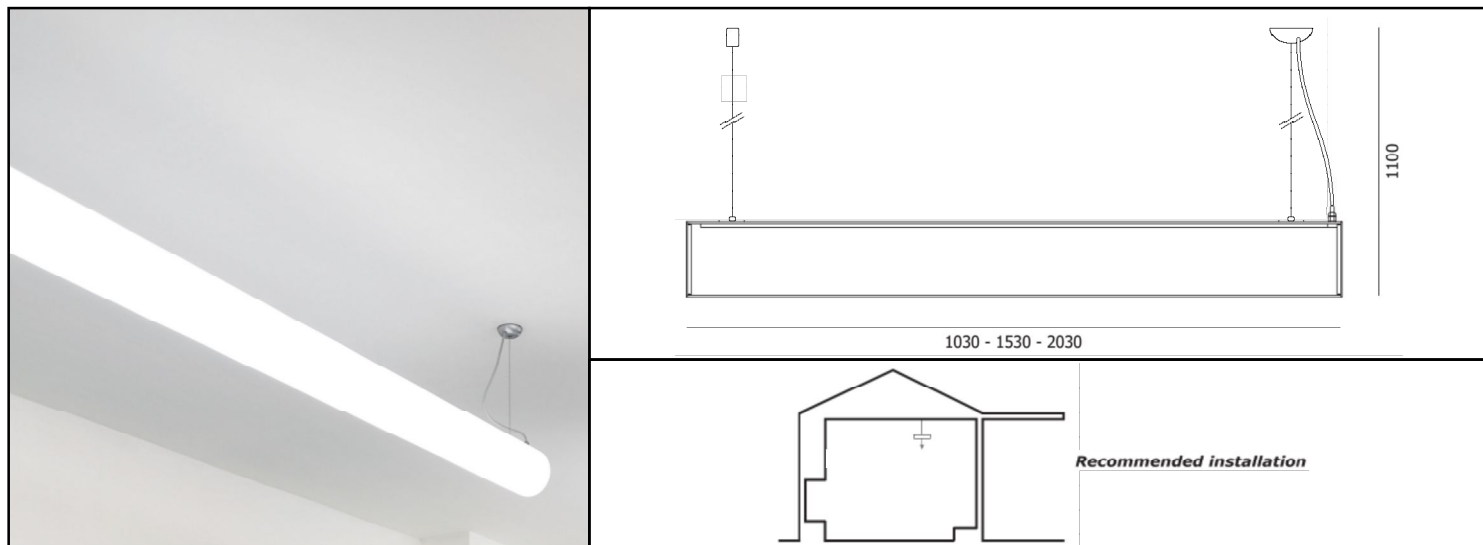

PRODUCT DESCRIPTION:

Light tube emitting a diffused and uniform light for indoor applications.
Body cylinder in PMMA, satin opal polycarbonate, stainless steel.
UV resistance of all materials.

TECHNICALS FEATURES:

Body	Cylinder in PMMA diameter 120mm
Finishes	Opal satin
Screws	Stainless steel inox AISI 316L
Power Supply	24 Vdc constant voltage
Power	15 W/m pitch 20mm
Light Source	Signal LED
Color Temperature	R=622nm, G=530nm, B=470nm
Lifetime	> 50000 h (L80B20)
Optics	Opal screen
Tc metal body	< 90 °C
Ta operating temperature	0 ÷ 40 °C
Functions	On/Off, dimmable
Cable	FROR flameproof 2X0,5 mm ² (white-black)+3X0,25 mm ² (R-G-B) Ø 6,5 mm L. 1 m
Weigth	1,8 Kg/m
Installations	Suspended (ceiling)
Norms	EN60598-1 ; EN60598-2 and its parts



NOTE:

Power supplies, control interfaces and dimming to be orderd separately. Aldabra driver consumption is equal to 15% of the fixture nominal power.
Photometric data available at www.aldabra.it

ALDABRA

PROFESSIONAL INTERIOR LIGHTING

BIG LINE S RGB

DATA-SHEET

GENERAL FEATURES:

	power (W)	Length (mm)	pitch (mm)
BLI.07.XXXXX.X	15	1030	20
BLI.08.XXXXX.X	23	1530	20
BLI.09.XXXXX.X	30	2030	20

OPTICAL FEATURES:

BLI.XX.DXXXX.X	Opal screen
----------------	-------------

LED FEATURES:


	Signal LED
BLI.XX.X90XX.X	R, G, B

FINISHES FEATURES:

BLI.XX.XXXP1.X	PMMA
----------------	------

BIG LINE W RGB

DATA-SHEET

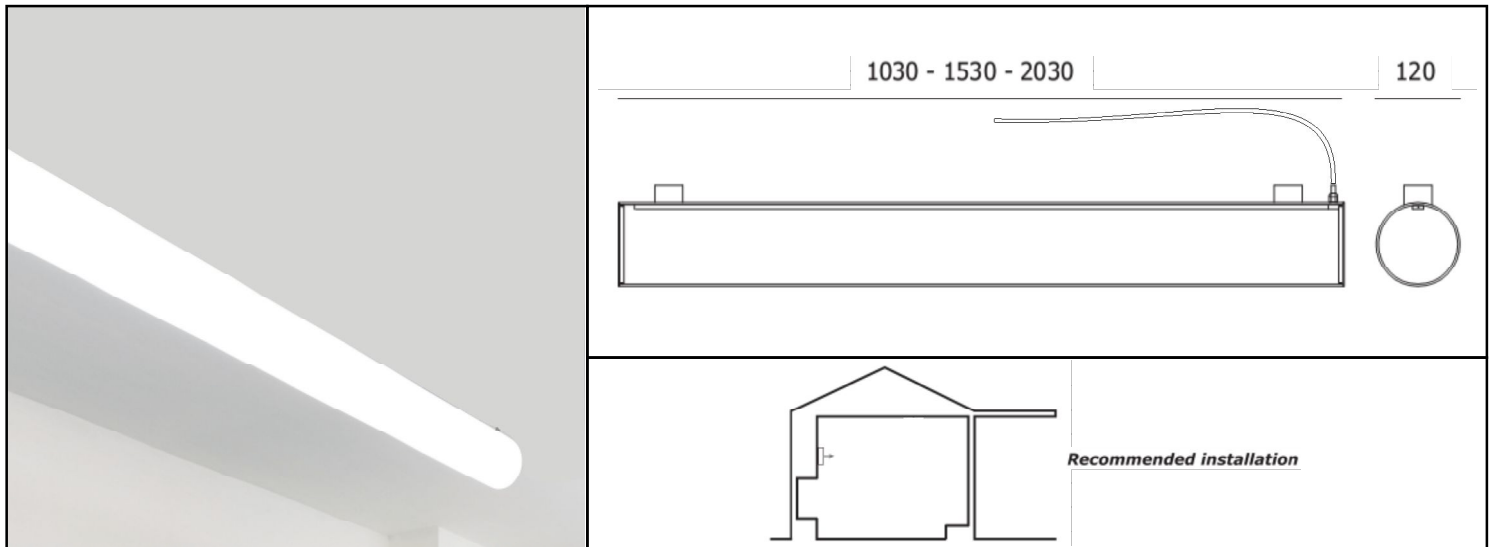

PRODUCT DESCRIPTION:

Light tube emitting a diffused and uniform light for indoor applications.
 Body cylinder in PMMA, satin opal polycarbonate, stainless steel.
 UV resistance of all materials.

TECHNICALS FEATURES:

Body	Cylinder in PMMA diameter 120mm
Finishes	Opal satin
Screws	Stainless steel inox AISI 316L
Power Supply	24 Vdc constant voltage
Power	15 W/m pitch 20mm
Light Source	Signal LED
Color Temperature	R=622nm, G=530nm, B=470nm
Lifetime	> 50000 h (L80B20)
Optics	Opal screen
Tc metal body	< 90 °C
Ta operating temperature	0 ÷ 40 °C
Functions	On/Off, dimmable
Cable	FROR flameproof 2X0,5 mm ² (white-black)+3X0,25 mm ² (R-G-B) Ø 6,5 mm L. 1 m
Weigth	1,8 Kg/m
Installations	Suspended (ceiling)
Norms	EN60598-1 ; EN60598-2 and its parts



NOTE:
 Power supplies, control interfaces and dimming to be orderd separately. Aldabra driver consumption is equal to 15% of the fixture nominal power.
 Photometric data available at www.aldabra.it

ALDABRA

PROFESSIONAL INTERIOR LIGHTING

BIG LINE W RGB

DATA-SHEET

GENERAL FEATURES:

	power (W)	Length (mm)	pitch (mm)
BLI.13.XXXXX.X	15	1030	20
BLI.14.XXXXX.X	23	1530	20
BLI.15.XXXXX.X	30	2030	20

OPTICAL FEATURES:

BLI.XX. D XXXX.X	Opal screen
-------------------------	-------------

LED FEATURES:

	Signal LED
BLI.XX.X 90 XX.X	R, G, B

FINISHES FEATURES:

BLI.XX.XXX P1 .X	PMMA
-------------------------	------