


## BLOK Monochromatic

### DATA-SHEET

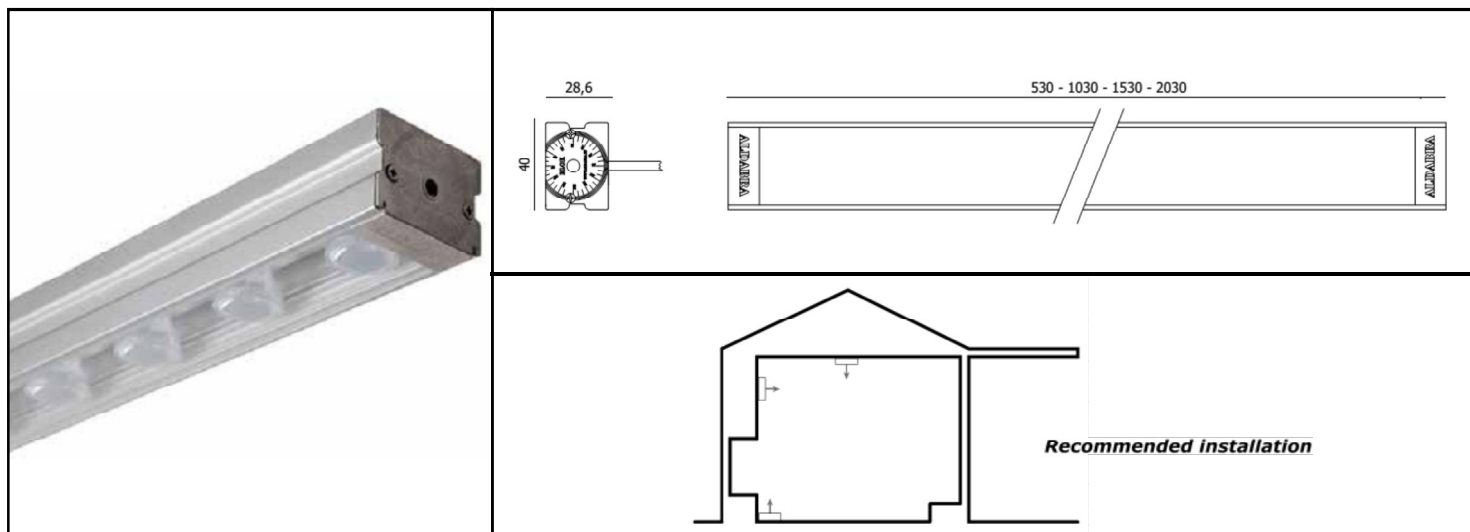

#### PRODUCT DESCRIPTION:

Professional linear system for indoor direct and indirect lighting applications.  
Body finished grey anodized aluminum with screen in transparent PMMA.

#### TECHNICALS FEATURES:

<b>Materials</b>	Aluminium extrusion alloy UNI 6060 ; Transparent PMMA
<b>Finishes</b>	Natural Anodized Aluminium
<b>Screws</b>	Stainless steel
<b>End caps</b>	Stainless steel
<b>Gaskets</b>	Silicone rubber
<b>Power Supply</b>	24 Vdc constant voltage
<b>Light Source</b>	Power LED
<b>Color Temperature</b>	2700K ; 3000K ; 4000K
<b>Ra</b>	> 80
<b>Chromatic Selection</b>	Mac-Adam 2-step
<b>Lifetime</b>	> 50000 h (TM21)
<b>Optics</b>	9° ; 24° ; 43° ; elliptical 40°x13°
<b>Tc metal body</b>	<90 °C
<b>Ta operating temperature</b>	0 ÷ 40 °C
<b>Functions</b>	On/Off ; dimmable
<b>Cable</b>	Cable E111036 Type CL2P-E130356 Type CMP-CMX 2xAWG20 (0.05mm <sup>2</sup> )(Yellow-Grey) + 1xAWG22 (0.3mm <sup>2</sup> ) (Violet) UL FEP/FEP Ø est. 3,7 mm L. 1m
<b>Weigth</b>	950 g/m
<b>Pitch</b>	50 mm ; 100 mm
<b>Installations</b>	Surface mounted (wall, floor, ceiling) with stainless steel clips or adjustable brackets
<b>Norms</b>	60598-1 ; 60598-2 and its parts



**850°C**

Con schermo in policarbonato a richiesta  
With polycarbonate screen on request



#### NOTE:

Power supplies, control interfaces and dimming to be orderd separately. Aldabra driver consumption is equal to 15% of the fixture nominal power.

Photometric data available at [www.aldabra.it](http://www.aldabra.it)

# ALDABRA

PROFESSIONAL INTERIOR LIGHTING

## BLOK Monochromatic

### DATA-SHEET

#### GENERAL FEATURES:

	power (W)	length (mm)	pitch (mm)
BLO.01.XXXXX.X	6	530	100
BLO.02.XXXXX.X	12	1030	100
BLO.03.XXXXX.X	17	1530	100
BLO.04.XXXXX.X	23	2030	100
BLO.05.XXXXX.X	12	530	100
BLO.06.XXXXX.X	24	1030	100
BLO.07.XXXXX.X	35	1530	100
BLO.08.XXXXX.X	47	2030	100
BLO.09.XXXXX.X	12	530	50
BLO.10.XXXXX.X	24	1030	50
BLO.11.XXXXX.X	35	1530	50
BLO.12.XXXXX.X	47	2030	50
BLO.13.XXXXX.X	25	530	50
BLO.14.XXXXX.X	49	1030	50
BLO.15.XXXXX.X	73	1530	50
BLO.16.XXXXX.X	98	2030	50

#### OPTICAL FEATURES:

BLO.XX.NXXXX.X	Spot 9°
BLO.XX.FXXXX.X	Medium beam 24°
BLO.XX.WXXXX.X	Wide beam 43°
BLO.XX.EXXXX.X	Elliptical 40°x13°
BLO.XX.TXXXX.X	Transparent screen

#### LED FEATURES:

	Mid-Power LED	lm/W	Ra	Chromatic selection
BLO.XX.X27XX.X	2700K warm white	105	>80	MacAdam 3-step
BLO.XX.X30XX.X	3000K warm white	118	>80	MacAdam 3-step
BLO.XX.X40XX.X	4000K neutral white	130	>80	MacAdam 3-step

#### FINISHES FEATURES:

BLO.XX.XXXA1.X Anodized Aluminium

