


CUT Monochromatic

DATA-SHEET

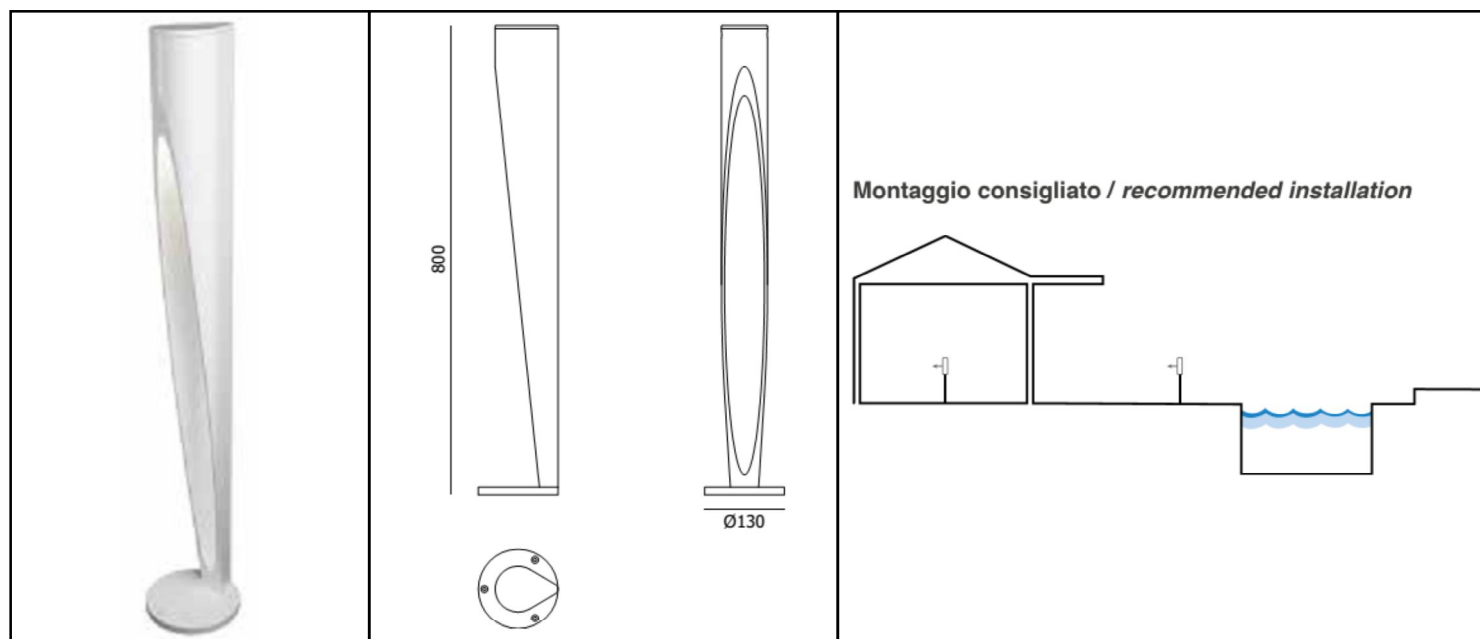


PRODUCT DESCRIPTION:

Professional indoor and outdoor bollard.

Body finished anodized aluminium or satin stainless steel. All the materials are suitable for use in swimming pools, fountains and with salt water. UV resistance of all materials.

TECHNICALS FEATURES:

Materials	ANTICORODAL aluminium alloy
Body Finishes	Painted white or black sablé
Power Supply	100-240 Vac
Power	6 W
Light Source	Power LED
Color Temperature	3000 K ; 4000 K
Ra	> 80
Chromatic Selection	Mac-Adam 2-step
Lifetime	> 50000 h (TM21)
Optics	Transparent diffuser 65°
Tc metal body	< 90 °C
Ta operating temperature	- 30 ÷ 50 C°
Functions	On/Off
Cable	CE : H05RNF 3x0,75 mm ² (Brown, Blue, Yellow/Green) Ø 6,1 mm L. 1,5 m UL : BLF C181 UL 4389 3XAWG18 (White, Black, Yellow/Green) L. 1,5 m
Weigth	3300 g.
Installations	Surface mounted (floor)
Norms	60598-1 ; 60598-2 and its parts



NOTE:

Fixing kits must to be orderd separately.

Photometric data available at www.aldabra.it

CUT Monochromatic DATA-SHEET

GENERAL FEATURES:

power @100-240 Vac

CUT.01.XXXXX.X

6 W

OPTICAL FEATURES:

CUT.XX.TXXXX.X

Transparent diffuser 65°

LED FEATURES:

	Power LED	lm/W	Ra	Chromatic selection
CUT.XX.X30XX.X	3000K warm white	105	>80	MacAdam 2-step
CUT.XX.X40XX.X	4000K neutral white	130	>80	MacAdam 2-step


FINISHES FEATURES:

CUT.XX.XXXW2.X


White sablé

CUT.XX.XXXB2.X

Black sablé




transparent diffuser 50° white sablé



transparent diffuser 50° black sablé

CUT RGB DATA-SHEET

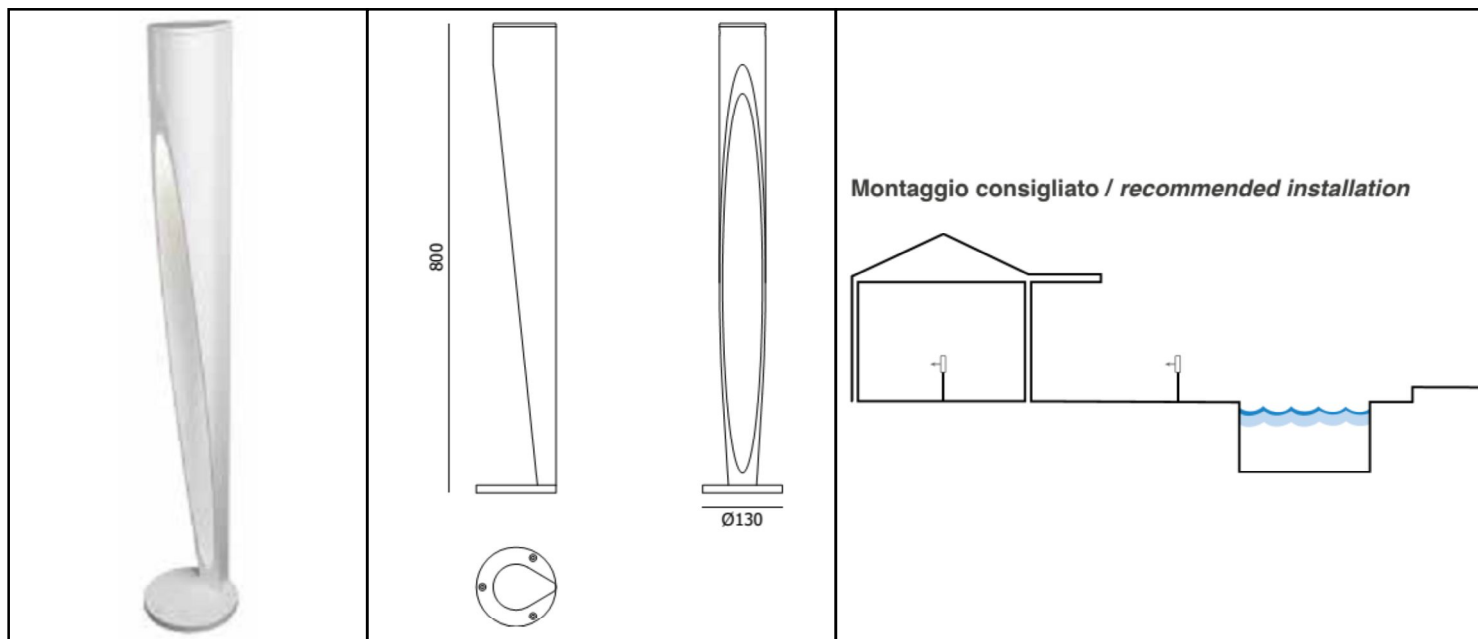


PRODUCT DESCRIPTION:

Professional indoor and outdoor bollard.

Body finished anodized aluminium or satin stainless steel. All the materials are suitable for use in swimming pools, fountains and with salt water. UV resistance of all materials.

TECHNICALS FEATURES:

Materials	ANTICORODAL aluminium alloy
Body Finishes	Painted white or black sablé
Power Supply	24 Vdc
Power	4 W
Light Source	Power LED
Color Temperature	R=622nm, G=530nm, B=470nm
Lifetime	> 50000 h (L80B20)
Optics	Transparent diffuser 50°
Tc metal body	< 90 °C
Ta operating temperature	- 30 ÷ 50 C°
Functions	On/Off ; dimmable
Cable	AWM style 20233 2xAWG18 (Red;Black)+3xAWG20 (R/N, G/N, B/N).
Weigth	3300 g.
Installations	Surface mounted (floor)
Norms	60598-1 ; 60598-2 and its parts



NOTE:

Power supplies, control&dimming devices and fixing kits must to be orderd separately. Aldabra power supply consumption is equal to 15% of the fixture nominal power.
Photometric data available at www.aldabra.it

ALDABRA

PROFESSIONAL EXTERIOR LIGHTING

CUT RGB

DATA-SHEET

GENERAL FEATURES:

power @ 24Vdc*

CUT.01.XXXXX.X

4 W

OPTICAL FEATURES:

CUT.XX.TXXXX.X

Transparent diffuser 65°

LED FEATURES:

Power LED

CUT.XX.X90XX.X

R, G, B


FINISHES FEATURES:

CUT.XX.XXXW2.X


White sablé

CUT.XX.XXXB2.X

Black sablé



transparent diffuser 50° white sablé



transparent diffuser 50° black sablé