


PAGURO Monochromatic DATA-SHEET

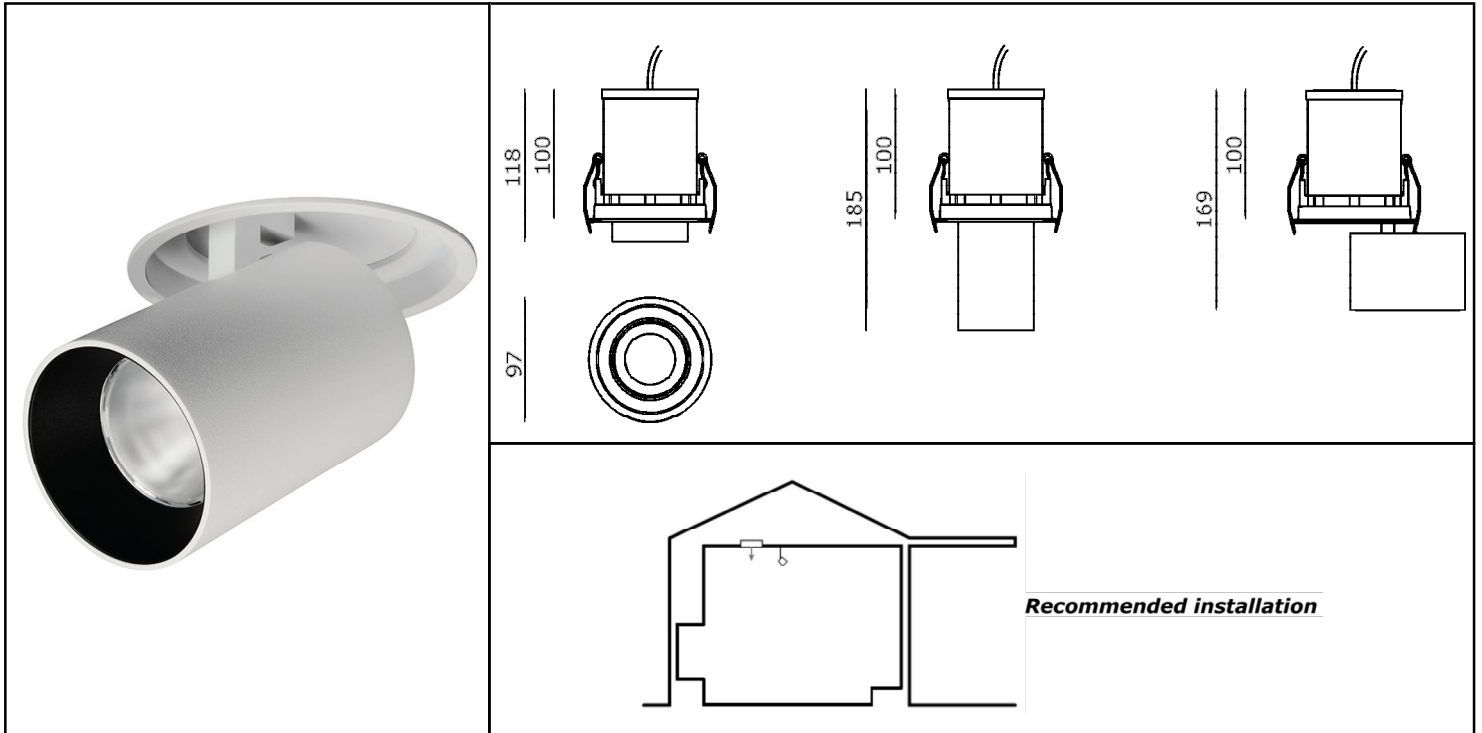

PRODUCT DESCRIPTION:

Family of recessed, fixed and adjustable spotlights for indoor applications, painted black or white.
Power supply included.

TECHNICALS FEATURES:

Materials	Aluminium die-cast
Finishes	Painted black or white
Power Supply	500 mA constant current
Power	9,5 W
Light Source	COB Power LED
Color Temperature	3000K ; 4000K
Ra	> 80
Chromatic Selection	Mac-Adam 3-step
Lifetime	> 50000 h (TM21)
Optics	16° - 32° - 45°
Tc metal body	<90 °C
Ta operating temperature	0 ÷ 40 °C
Ts surface temperature	≤ 65 °C
Functions	On/Off
Weigth	510 g
Installations	Recessed (ceiling) through steel springs, adjustable angle 0÷90°/350°
Norms	EN 60598-1 ; EN 60598-2 and its parts



NOTE:

Power supplies, control&dimming devices and fixing kits must to be orderd separately. Aldabra power supply consumption is equal to 15% of the fixture nominal power.
Photometric data available at www.aldabra.it

PAGURO Monochromatic DATA-SHEET

GENERAL FEATURES:

	power (W)	lm
PAG.01.XXXXX.X	9,5	728 (4000K)

OPTICAL FEATURES:


PAG.XX.MXXXX.X	Narrow beam 16°
PAG.XX.FXXXX.X	Medium beam 32°
PAG.XX.WXXXX.X	Wide beam 45°

LED FEATURES:


	COB Power LED	Ra	Chromatic selection
PAG.XX.X30XX.X	3000K warm white	>80	MacAdam 2-step
PAG.XX.X40XX.X	4000K warm white	>80	MacAdam 2-step

FINISHES FEATURES:


PAG.XX.XXXW1.X	Anodized Aluminium
----------------	--------------------

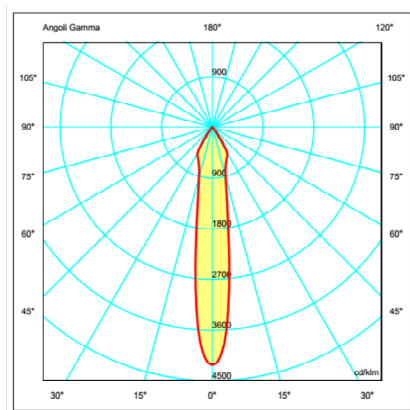

Narrow beam 16°

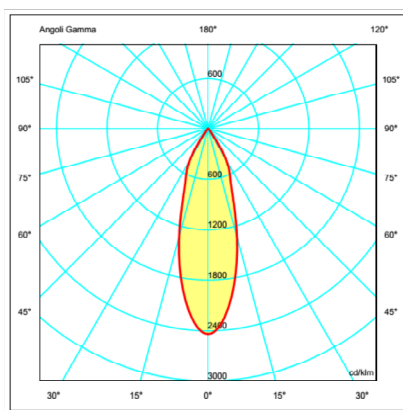

Medium beam 32°

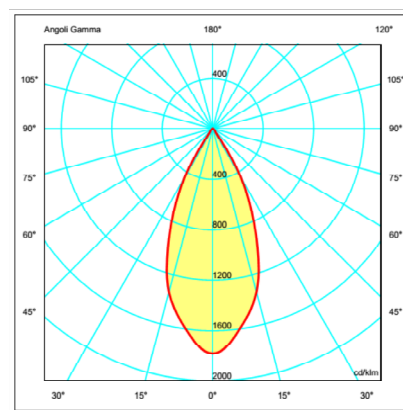

Wide beam 45°