


RIGA C Monochromatic DATA-SHEET

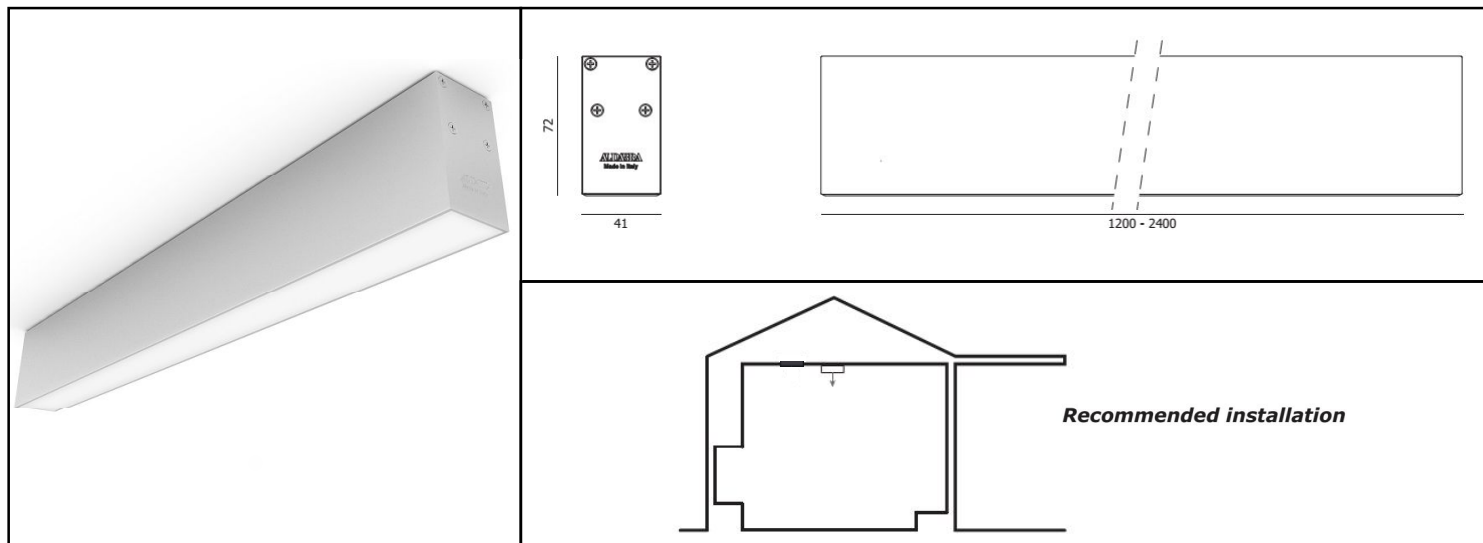

PRODUCT DESCRIPTION:

No glare ceiling mounted linear system for indoor applications.
Body Anticorodal aluminium alloy EN AW-6060, stainless steel.
UV resistance of all materials.

TECHNICALS FEATURES:

Body	Anticorodal aluminium alloy EN AW-6060
Finishes	Matt white
End caps	Anticorodal aluminium alloy EN AW-6060
Screws	Stainless steel inox AISI 316L
Screen	Polycarbonate no glare prismatic or opal screen
Power Supply	220-240 Vac 50/60 Hz mains voltage
Power	40W - 80W
Light Source	Mid Power LED
Color Temperature	3000K
Ra	> 80
Chromatic Selection	Mac-Adam 3-step
Lifetime	> 50000 h (TM21)
Optics	Satin screen ; prismatic screen
Tc metal body	< 90 °C
Ta operating temperature	0 ÷ 35 °C
Functions	On/Off ; dimmable
Cable	H037T 3X0,75 mm ² FEP + SIL transparent Ø 5mm L. 2,5m
Weigth	2750g
Installations	Surface mounted (ceiling)
Norms	EN60598-1 ; EN60598-2 and its parts ; EN55015 ; EN61000-3-2 ; EN61000-3-3 ; EN61347-1 ; EN61347-2-13 ; EN61547



NOTE:

Photometric data available at www.aldabra.it

RIGA C Monochromatic

DATA-SHEET

GENERAL FEATURES:

	power (W)	Length	pitch
RIG.01.XXXXX.X	40	1200	25
RIG.02.XXXXX.X	80	2400	25

OPTICAL FEATURES:


RIG.XX.SXXXX.X	Satin screen
RIG.XX.VXXXX.X	Prismatic screen

LED FEATURES:


	Mid Power LED	lm/W	Ra	Chromatic selection
RIG.XX.X30XX.X	3000K warm white	118	>80	MacAdam 3-step

FINISHES FEATURES:

RIG.XX.XXXW1.X	Matt white
-----------------------	------------




Satin screen



Prismatic screen

RIGA R Monochromatic DATA-SHEET

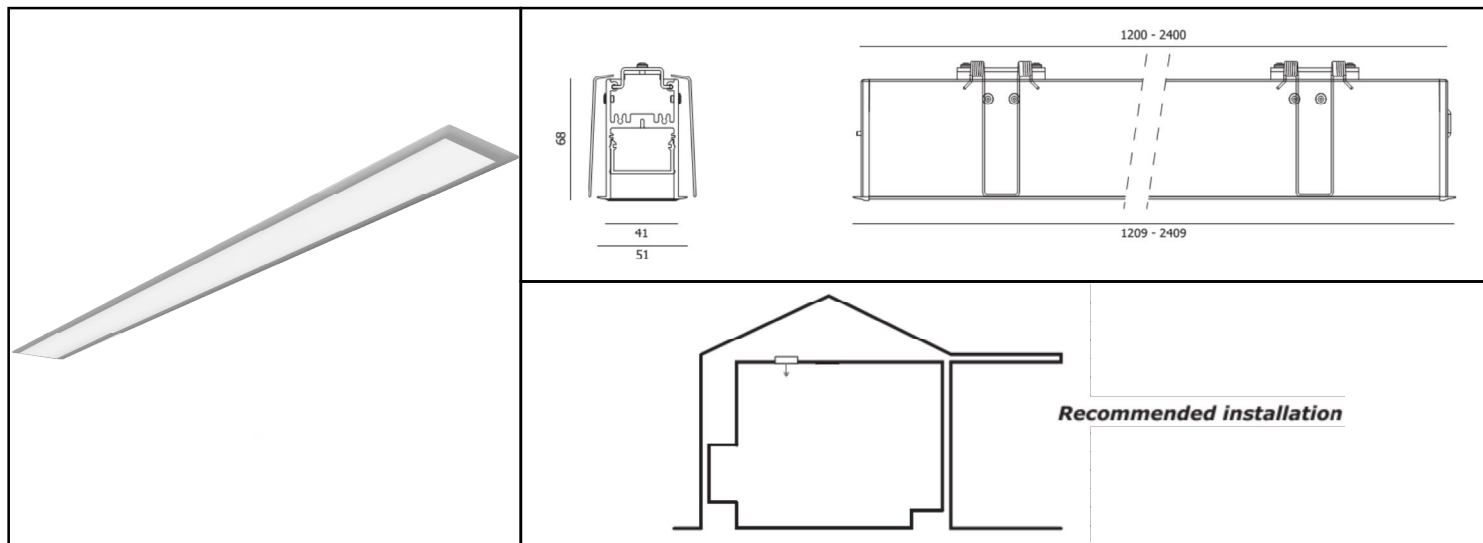

PRODUCT DESCRIPTION:

No glare recessed linear system for indoor applications.
Body Anticorodal aluminium alloy EN AW-6060, stainless steel.
UV resistance of all materials.

TECHNICALS FEATURES:

Body	Anticorodal aluminium alloy EN AW-6060
Finishes	Matt white
End caps	Anticorodal aluminium alloy EN AW-6060
Screws	Stainless steel inox AISI 316L
Screen	No glare prismatic or opal screen
Power Supply	220-240 Vac 50/60 Hz mains voltage
Power	40W - 80W
Light Source	Mid Power LED
Color Temperature	3000K
Ra	> 80
Chromatic Selection	Mac-Adam 3-step
Lifetime	> 50000 h (TM21)
Optics	Satin screen ; prismatic screen
Tc metal body	< 90 °C
Ta operating temperature	0 ÷ 35 °C
Functions	On/Off ; dimmable
Cable	H037T 3X0,75 mm ² FEP + SIL transparent Ø 5mm L. 2,5m
Weigth	2700g
Installations	Recessed (ceiling) with stainless steel springs
Norms	EN60598-1 ; EN60598-2 and its parts ; EN55015 ; EN61000-3-2 ; EN61000-3-3 ; EN61347-1 ; EN61347-2-13 ; EN61547



NOTE:

Photometric data available at www.aldabra.it

RIGA R Monochromatic

DATA-SHEET

GENERAL FEATURES:

	power (W)	Length	pitch
RIG.03.XXXXX.X	40	1200	25
RIG.04.XXXXX.X	80	2400	25

OPTICAL FEATURES:


RIG.XX.SXXXX.X	Satin screen
RIG.XX.VXXXX.X	Prismatic screen

LED FEATURES:


	Mid Power LED	lm/W	Ra	Chromatic selection
RIG.XX.X30XX.X	3000K warm white	118	>80	MacAdam 3-step

FINISHES FEATURES:

RIG.XX.XXXW1.X	Matt white
-----------------------	------------



Satin screen



Prismatic screen