

Aim L

Product Description

Aim L is a versatile recessed downlight that suits a variety of applications from residential through to retail and hospitality. It is IP44 rated, available in 3 different wattages (20, 28 and 38W), 4 beam widths (15°, 23°, 35° and 60°) and can be suitably dimmed via dali, phase or 1-10V dimming. The deep housing reduces glare and has a smooth, curved interior.

Product Details


Application	General Illumination
Trim Colours	White / Black
Materials	Aluminium body
LED	COB LED

Technical Data

Input Power	240V
Power Consumption	20W / 28W / 38W
CRI	>90
Lumen Maintenance	70% at 33 000 hrs
Dimming	Dali
	Phase
	1-10V
Cut Out	210mm
Beam Angle	15° / 23° / 35° / 60°
Colour Temperature	3000K
	4000K
Warranty	5 year limited warranty
IP	44

Luminous Flux

CCT	20W	28W	38W
3000K	1480 lm	1910 lm	2580 lm
4000K	1590 lm	2130 lm	2810 lm

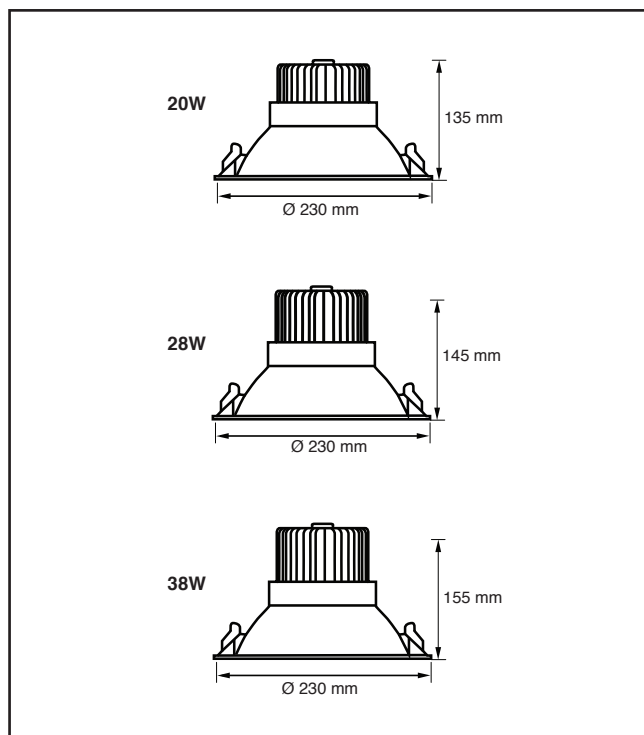

Order Information

Specify fitting options as per example below to order.

Example: **AL - 20W - 3 - NB - 3k - TR**

Fitting	Wattage	Colour	Beam	CCT	Dim
AL					
AR Aim Large	20W 20 Watts 28W 28 Watts 38W 38 Watts	2 Black 3 White	XNB Extra Narrow Beam (15°) NB Narrow Beam (23°) MB Wide Beam (35°) WB Wide Beam (60°)	3K 3000K 4K 4000K	TR Leading/ Trailing DD Dali Dim DC 1-10V DC Control